



Distribution Head **DOMAX**



Fertilizer/Seed Wagon
PLÆNTY 3000



Fertilizer Injection
GRANU-Inject




Fertilizer Injection
GRANU-Inject Mini 600



Controller
autoFLOAT ISOBUS



Distribution Head
DOMAX

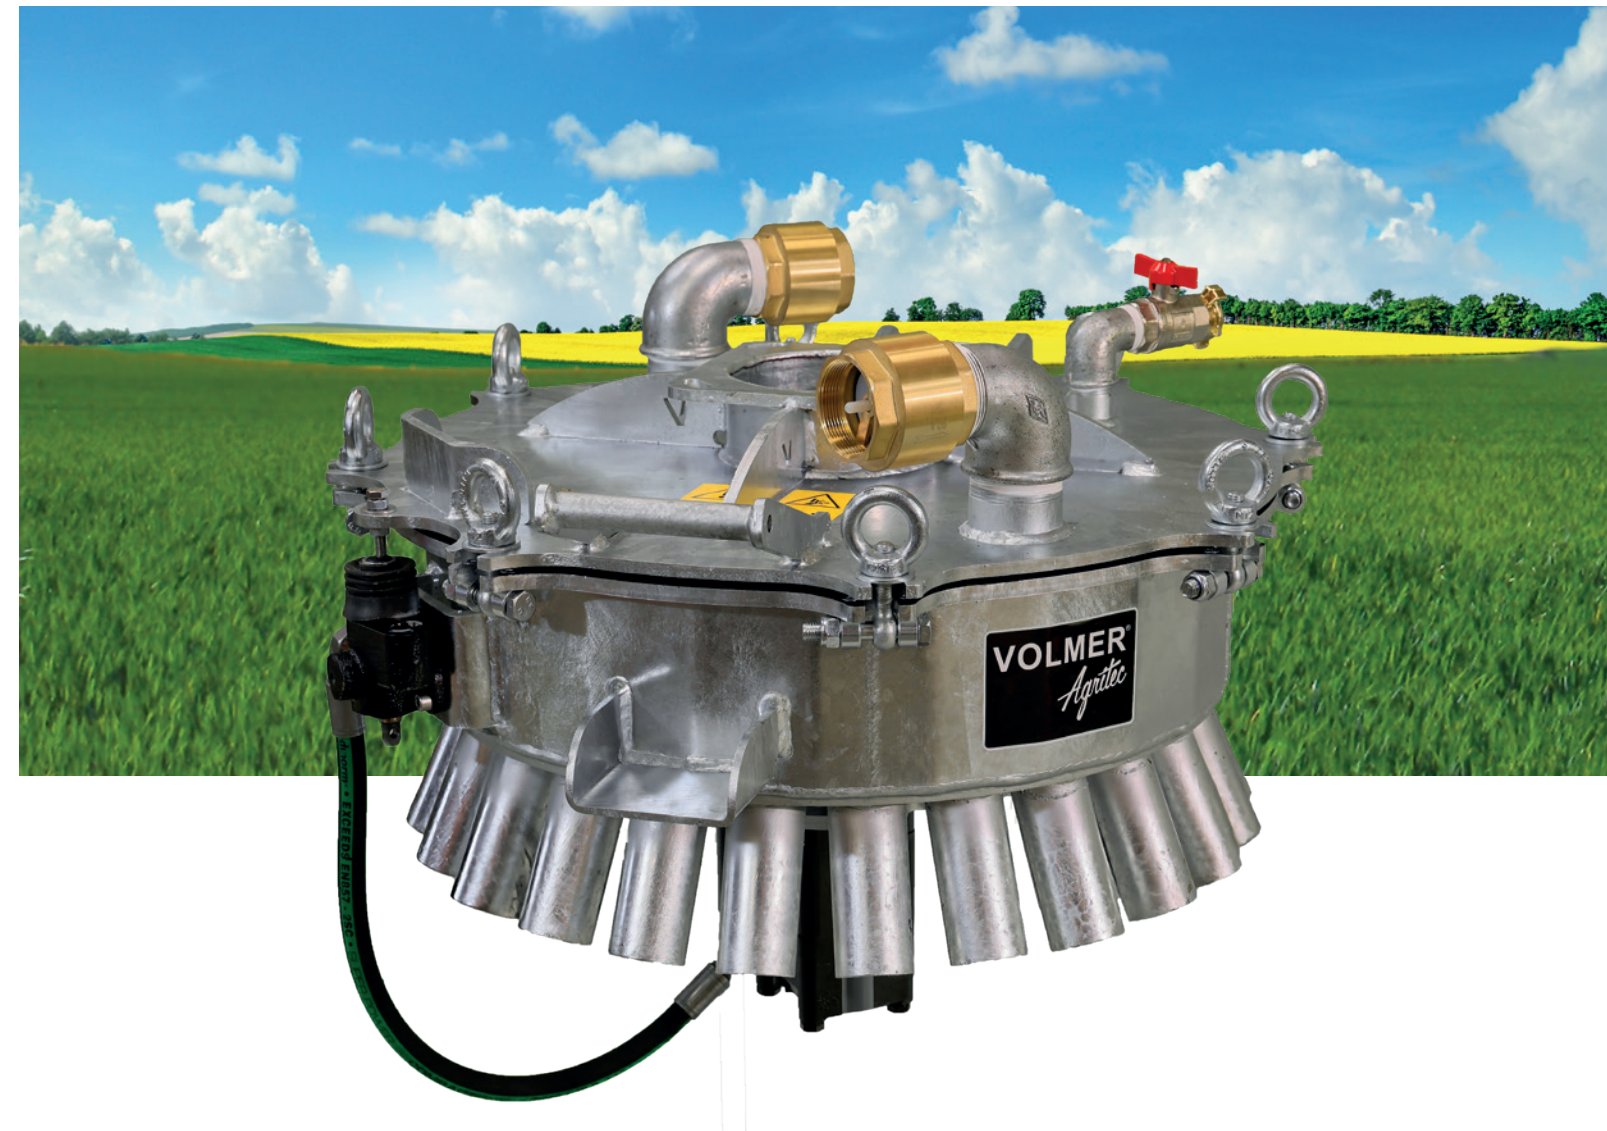

VOLMER AGRITEC GmbH

Lingener Damm 229
48429 Rheine

www.volmer-agritec.de

Phone. +49 59 71 94 63 2 - 0

Fax +49 59 71 94 36 2 - 90

info@volmer-agritec.de

DOMAX




www.volmer-agritec.de



Distribution Head DOMAX



The DOMAX distribution head was specially developed to meet the high demands of modern application vehicles with high pumping capacities (up to 12,000 l/min). A low-wear design as well as high-quality assemblies and bearings, ensure trouble-free operation and short maintenance times. Even small application rates can be dosed with absolute precision. Quantity adjustments and maintenance can be carried out in just a few simple steps.

fig.: DOMAX 24/50H

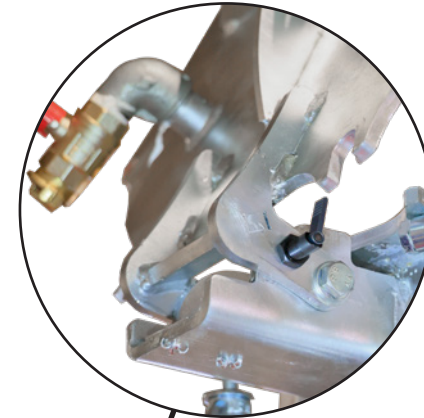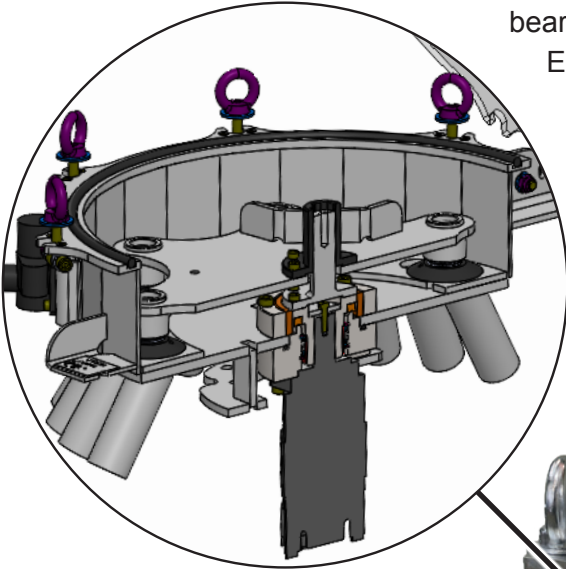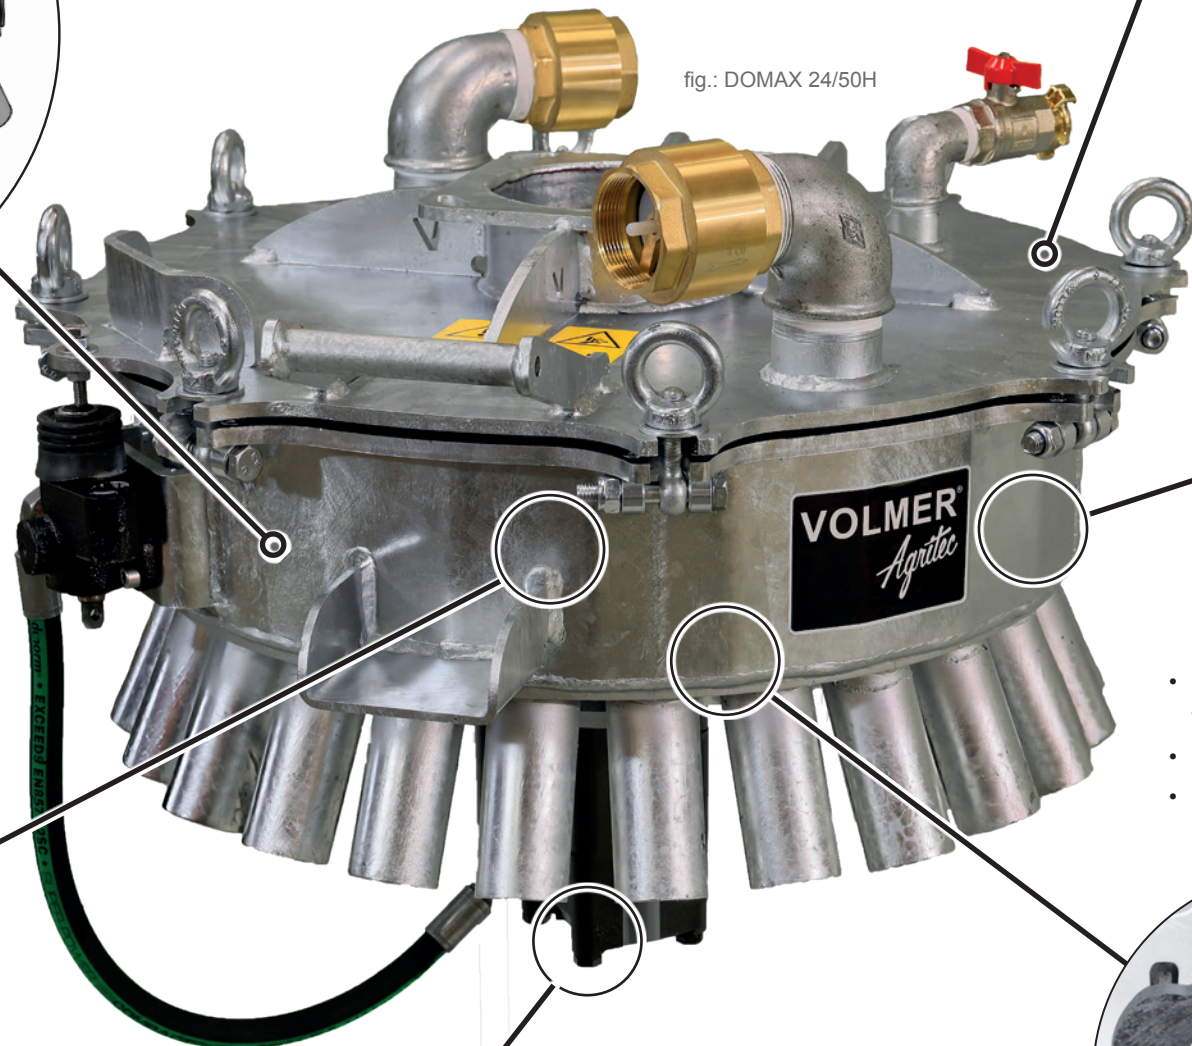

1. Top-Cover

- Stable steel handle
- Top-cover lock with locking bolt
- 8 top-cover fastener
- 6" Universal connection
- 1" Flush-connection with GEKA coupling
- 22" Air connection with non-return valve for quick emptying when lifting (headland)

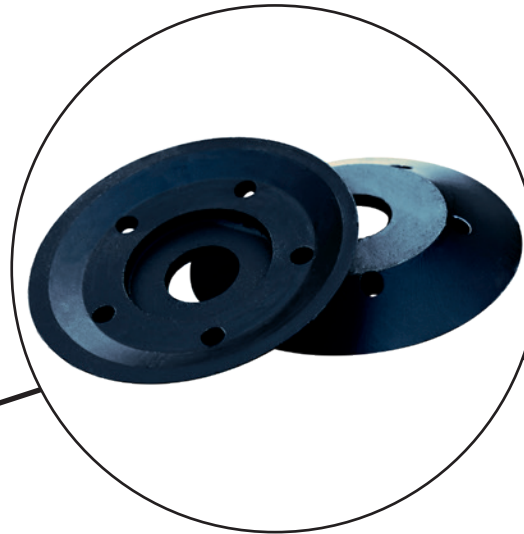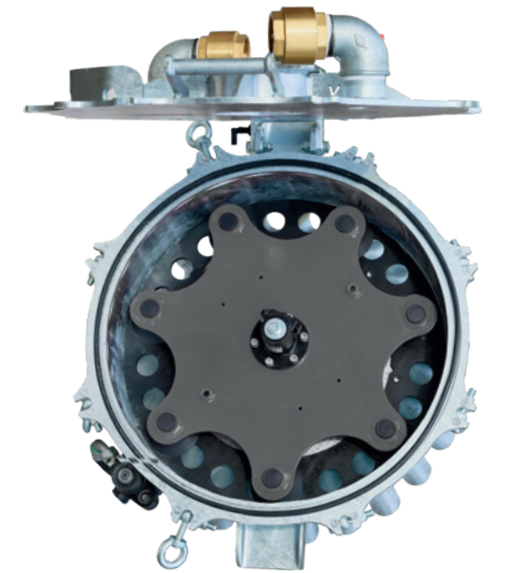

2. Rotor & Knife

- Hardened, low-wear circular blades, spring-mounted with flow-through holes to avoid pulsation
- Low-wear counter blade with flow rate adjustment
- Quick change of the rotor




4. Bracket

- Universal holder
- Matching counter plate available, to weld on



7. Housing

- Fully galvanized steel housing
- UV-stable materials
- Large, pressure-resistant sealing
- Hydraulic safety valve

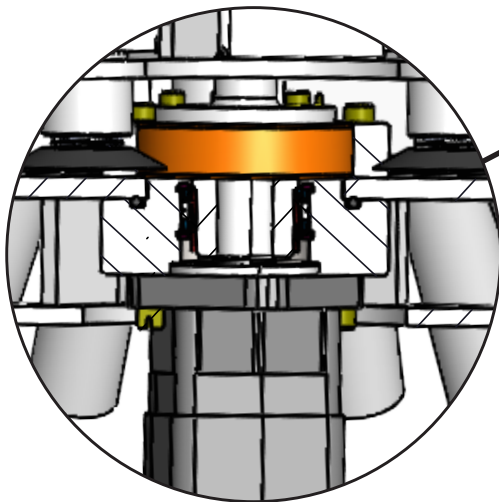

6. Storage

- Robust rotor bearing separated from the slurry circuit
- Durable and pressure-resistant triple-sealing



5. Motor

- Hydraulic motor with large displacement 400 cm³
- High torque even at low speed
- Standard hydraulic connections

3. Data

	Unit of measurement	DOMAX 16/50H	DOMAX 24/50H	DOMAX 28/50H
max. flow rate	l/min	12.000	12.000	12.000
Outlets	Piece	16	24	28
Pipe diameter outlets	mm	50	50	50
Distribution head diameter	mm	~ 535	~ 660	~ 740
Mounting plate height up to 6" connection	mm	295	295	295

Weights and dimensions are approximate and non-binding. Subject to change without notice.